


DR-18



CARACTERISTICAS TECNICAS technical characteristics

Material Cabezal y Válvulas pumphead and valves material	PVC ; PVDF ; Inox-Aisi-316
Regulación adjustment	Manual 0-100 %
Ø Pistón:	Inox-Aisi-316 ; PE ; Cerámica
Juntas Pistón gaskets	FPM
Longitud Carrera stroke length	17,5 mm
Cárter: gearbox	Aluminio con baño de aceite aluminium lubricate gearbox
Potencia Motor motor power	1/3 Cv.
Voltage voltage	50hz: 230V Monof.- single-phase 230/400V Trif.- three-phase 60hz: 440V Trif.- three-phase

DIMENSIONES dimensions

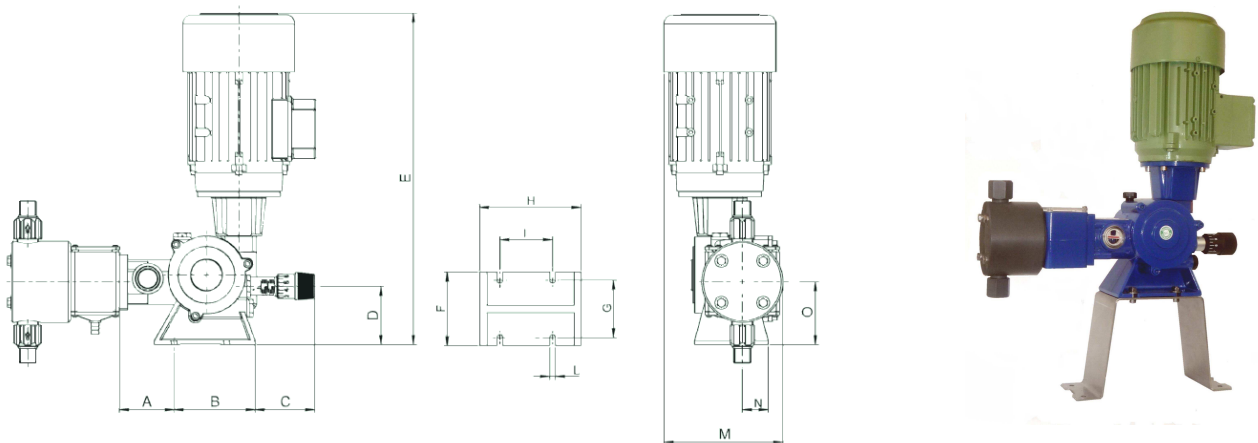

TIPO type	Qmax [l/h]	Pmax PVC	Pmax Inox	Imp	Vál. A/I	A	B	C	D	E	F	G	H	I	L	M	N	O
DR-18X30.B	72		20	96	1/2"	68	100	70	73	410	90	75	125	65	7	170	33	78
DR-18X30.C	90	-	20	120	1/2"	68	100	70	73	410	90	75	125	65	7	170	33	78
DR-18X38.B	115	10	13	96	1/2"	68	100	70	73	410	90	75	125	65	7	170	33	78
DR-18X38.C	144			120	1/2"	68	100	70	73	410	90	75	125	65	7	170	33	78
DR-18X48.A	130			70		68	100	70	73	410	90	75	125	65	7	170	33	78
DR-18X48.B	181	8,5	8,5	96	1/2"	68	100	70	73	410	90	75	125	65	7	170	33	78
DR-18X48.C	226			120		68	100	70	73	410	90	75	125	65	7	170	33	78
DR-18X54.A	168			70		68	100	70	73	410	90	75	125	65	7	170	33	78
DR-18X54.B	232	6,5	6,5	96	3/4"	68	100	70	73	410	90	75	125	65	7	170	33	78
DR-18X54.C	290			120		68	100	70	73	410	90	75	125	65	7	170	33	78
DR-18X64.A	236			70		68	100	70	73	410	90	75	125	65	7	170	33	78
DR-18X64.B	384	4,5	4,5	96	3/4"	68	100	70	73	410	90	75	125	65	7	170	33	78
DR-18X64.C	408			120		68	100	70	73	410	90	75	125	65	7	170	33	78


DR-25



CARACTERISTICAS TECNICAS technical characteristics

Material Cabezal y Válvulas pumphead and valves material	PVC ; PVDF ; Inox-Aisi-316
Regulación adjustment	Manual 0-100 %
Ø Pistón:	Inox-Aisi-316 ; PE ; Cerámica
Juntas Pistón gaskets	FPM
Longitud Carrera stroke length	25 mm
Cárter: gearbox	Aluminio con baño de aceite aluminium lubricate gearbox
Potencia Motor motor power	3/4 Cv.
Voltage voltage	50hz: 230V Monof.- single-phase 230/400V Trif.- three-phase 60hz: 440V Trif.- three-phase

DIMENSIONES dimensions

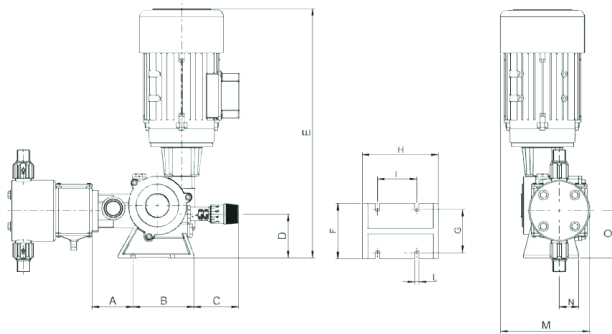

TIPO type	Qmax [l/h]	Pmax PVC	Pmax Inox	Imp	Vál. A-I	A	B	C	D	E	F	G	H	I	L	M	N	O
DR-25X38.B	164	--	20	96	1/2"	75	127	120	70	450	154	130	157	102	9	194	60	78
DR-25X38.C	191			112	1/2"	75	127	120	70	450	154	130	157	102	9	194	60	78
DR-25X48.B	257			96	3/4"	75	127	120	70	450	154	130	157	102	9	194	60	78
DR-25X48.C	300	10	17	112	3/4"	75	127	120	70	450	154	130	157	102	9	194	60	78
DR-25X54.A	192			56		75	127	120	70	450	154	130	157	102	9	194	60	78
DR-25X54.B	329	10	13	96	3/4"	75	127	120	70	450	154	130	157	102	9	194	60	78
DR-25X54.C	384			112		75	127	120	70	450	154	130	157	102	9	194	60	78
DR-25X64.A	266			56		75	127	120	70	450	154	130	157	102	9	194	60	78
DR-25X64.B	456	9,5	9,5	96	1"	75	127	120	70	450	154	130	157	102	9	194	60	78
DR-25X64.C	532			112		75	127	120	70	450	154	130	157	102	9	194	60	78
DR-25X76.A	383			56		75	127	120	70	450	154	130	157	102	9	194	60	78
DR-25X76.B	657	6,5	6,5	96	1"	75	127	120	70	450	154	130	157	102	9	194	60	78
DR-25X76.C	766			112		75	127	120	70	450	154	130	157	102	9	194	60	78
DR-25X89.A	521			56		75	127	120	70	450	154	130	157	102	9	194	60	78
DR-25X89.B	893	4,8	4,8	96	1"	75	127	120	70	450	154	130	157	102	9	194	60	78
DR-25X89.C	1042			112		75	127	120	70	450	154	130	157	102	9	194	60	78