

The **PoolDose** Display is a professional pump suitable for use in Swimming Pool markets.



TECHNICAL CHARACTERISTICS:

- **FLOW RATES**
 - 1,5 l/h;
 - 5 l/h
- **BACK PRESSURE**
 - 1,5 bar
- **POWER SUPPLY**
 - 230÷Vac - 50/60 Hz - 7W or 12,5 W with galvanized insulation
- **MATERIALS**
 - **ENCLOSURE:** ABS with fiber glass
 - **PUMP HEAD:** PP
 - **TUBES:** Santoprene
- **DOSING**
 - proportional mode
- **MOTORS**
 - Brushed DC Motors
- **MEASURE**
 - 0 ÷14 pH measure
 - 0 ÷1000 Redox measure
 - 0 – 5,00 ppm Free Chlorine
- **FUNCTIONS**
 - Proportional dosing by pH feedback measure

FEATURES:


- IP 65 Level Protection
- Alphanumeric Display
- Wheel holder mounted on ball bearing, for a longer pump life
- New motors with extended life time
- Snap on transparent cover
- Two roller PTFE body, for a more proportional dosing and an extended lifetime

PUMP KEY CODE

1	Pool Series							
	2	Model: One, Dose, Master						
		3-4	Measure: pH, MV, CL					
			5-6	Pressure: 0H=0,5 Bar, 1H= 1,5Bar, 20= 2 Bar				
				7-8	Flowrate: 0H=0,5 L/H, 1H= 1,5L7H, 20= 2 L/H			
				9	Power Supply: A= 220 Vac			
					10	Option		
			11-12		Free			
P	D	PR	1H	1H	A	0	00	

DIMENSIONS

Single

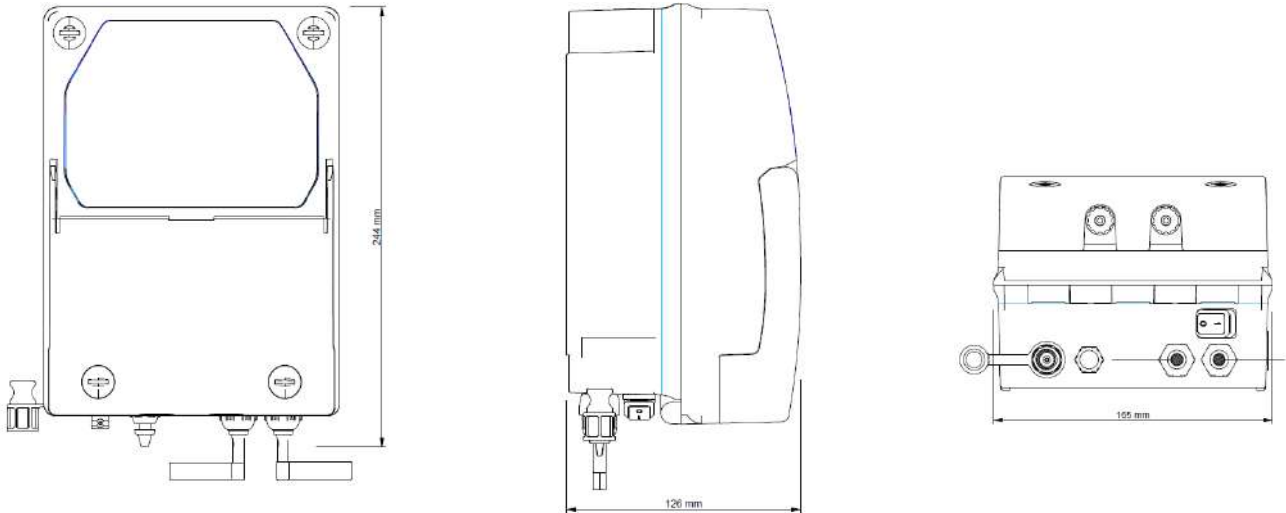

Double and Triple

